ISSUED JULY 2026 • INDEX NO. ED/4.79

# Trailblazer® 330 Air Pak™

Gas Engine-Driven Welder

## QUICK SPECS

### Industrial Applications
Fabrication
Maintenance
Repair
Structural steel work
Sheet metal
Pipe

### Processes
Stick (SMAW)
MIG (GMAW)*
Flux-cored (FCAW)*
RMD®**
DC TIG (GTAW)
Air carbon arc (CAC-A) cutting and gouging
Rated: 3/16-inch carbons, Capable: 1/4-inch carbons
Air plasma cutting and gouging
with optional Spectrum® models

*With wire feeder.*
***With ArcReach Smart Feeder.*

### Output Range
DC stick/DC TIG: 20–330 A MIG/flux-cored: 15–40 V

### Auxiliary Power Output Rated at 104°F (40°C)
12,000 watts peak, 10,500 watts continuous

### Air Compressor
30 cfm, 100% duty cycle, 80–160 psi

### Excel™ Power
2,400 watts (120 V, 20 A) 60 Hz pure sine power at all speeds

### Battery Charge/Crank Assist
Battery charge: 12/24 V, 150 A Crank assist: 12/24 V, 300 A

## Powerful all-in-one tool designed for repair and construction with multiprocess weld quality, auxiliary power, air compressor and battery charge/crank assist.

**The Trailblazer exclusive technologies —** advanced Auto-Speed™ and Excel™ power — deliver superior runtimes, increase fuel efficiency, and improve engine-driven welder performance.

No other compact machine in the 300-amp class delivers more welding power, more auxiliary power, and air with better fuel efficiency and less noise — for productive, profitable, quieter jobsites.

WIRELESS INTERFACE CONTROL



**Full control of your machine in the palm of your hand.** See page 3.

DYNAMIC DIG™

**Optimized arc control for stick welding applications.** See page 2.

ArcReach®

**Parameter control at the wire feeder or pendant without needing a control cord.** See page 2.



**Trailblazer 330 Air Pak with battery charge/crank assist and Excel power shown.**

**Easy to use**
Digital interface speeds machine setup and makes it less complicated.

**Exceptional arc performance**
Easy arc starts and less spatter.

**Easier mobility and uses less truck space and payload**
Over 80 pounds lighter and 13 percent smaller than previous model.

**Easy maintenance**
With its intuitive design, the daily maintenance of our Trailblazer engine-driven welder is fast and easy.

**Rotary screw compressor**
Quiet and durable compressor delivers 30 cfm at 80–160 psi of air at 100 percent duty cycle.

TRUE BLUE® 3YR. WARRANTY

Engine-driven welder/air compressor/battery charger is warrantied for three years, parts and labor.
Engine is warrantied separately by the engine manufacturer.

Miller®

**Miller Electric Mfg. LLC**
An ITW Welding Company
1635 West Spencer Street
P.O. Box 1079
Appleton, WI 54912-1079 USA

**Equipment Sales US and Canada**
Phone: 866-931-9730
International Phone: 920-735-4554

**MillerWelds.com**

Certified System ISO 9001 Quality

# The Trailblazer® Advantage

## Dynamic DIG™ technology

**Ultra-adaptive arc control.** Unlike conventional DIG that provides a preset amount of short-clearing current, Miller-exclusive Dynamic DIG technology works on a time-based algorithm that automatically adjusts the amount of current required to clear a short. Delivers a smoother more consistent arc that can be tailored to match application, material, fit-up and welder technique.

## ArcReach® technology

**Parameter control at the wire feeder or pendant without needing a control cord.** An ArcReach system allows you to change weld settings from your ArcReach feeder or stick/TIG remote, saving a trip to the power supply. ArcReach technology uses the existing weld cable to communicate welding control information between the feeder or stick/TIG remote and the power source. This technology eliminates the need for control cords, and their associated problems and costs.

## Battery charge/crank assist

**Reduce downtime with battery charge/crank assist capability.** Designed and recommended for mechanics or anyone else responsible for a fleet of trucks or equipment. By using your Trailblazer to charge dead batteries or jump a stubborn engine, you'll keep your crew working and the fleet up and running.

*Note: Battery charge/jump cables (300422) must be ordered separately.*

## Excel™ power

**Power at idle — a Miller exclusive.** Unlike competitive machines that provide auxiliary power only at 3,600 rpm (max), Excel power delivers a full 2,400 watts (20 A) of 120-volt inverter-based, pure sine-wave power at idle. With Excel power you can operate jobsite tools like grinders at quiet, fuel-saving speeds.

Refueling time and operating costs are reduced with Excel power, which means more productivity and profitability. Plus everyone on the jobsite gets a better working environment because noise levels and exhaust emissions are lowered. Excel power — available only from Miller.


## Electronic fuel injection (EFI)

**Improve fuel efficiency for maximum productivity and profitability.** EFI adds multiple benefits to your Trailblazer 330 Air Pak™ engine-driven welder. With EFI, you'll get faster, more-reliable starts in any weather — no choke adjustments needed. EFI-equipped Trailblazer 330 Air Pak machines are also up to 42 percent more fuel efficient than standard carbureted models, improving profitability. Plus, refueling less frequently means you'll spend more of your time welding, improving productivity.

**Increased performance at high altitude.** Electric fuel pumps are now standard on all EFI models, leading to better performance when operating at altitudes of 5,000 feet or greater.


## Auto-Set™ technology

Auto-Set offers predefined weld settings to increase ease of use and ensure that the job is done right for operators of all skill levels.

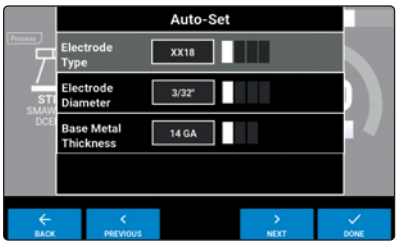


## Data visibility


Predictive maintenance information helps you plan necessary service time. Productivity screens make it easier for you to monitor machine use.

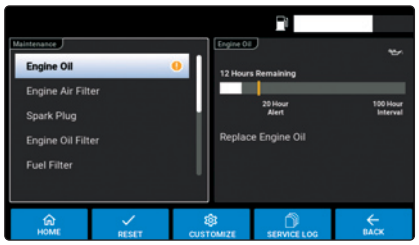


## Industrial rotary-screw air compressor

Runs most air impact wrenches at idle and gives 100 percent deliverable air. Produces 30 cfm of air at 100 percent duty cycle and delivers 80–160 psi of air with no storage tank. Provides four convenient air compressor access points. The air outlet connection requires a 1/2-inch NPT swivel fitting. Compressor is warrantied by Miller for three years.



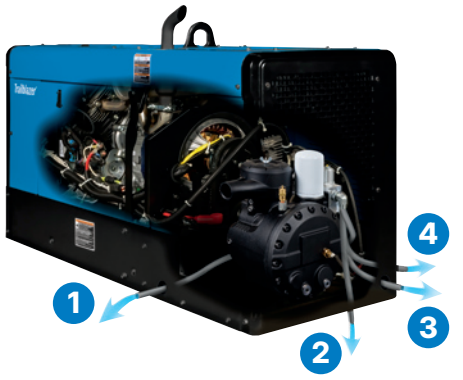


## Direct spool gun connection

Make it easy to weld aluminum. Expand the types of jobs you can take on. Adapters are no longer required with the integrated 10-pin connection. Optimized for Spoolmate™ and Spoolmatic® spool guns.



# The Trailblazer® Advantage

## Advanced Auto-Speed™ technology

**Matches engine speed to load — a Miller exclusive.** Get the welding power you need — plus reduced fuel consumption and lower noise levels for a more profitable jobsite.

Advanced Auto-Speed technology automatically varies engine speed from 2,400–3,600 rpm to match compressed air, battery charge and weld demands — reducing fuel consumption, maintenance costs and noise for a more efficient jobsite.

## Long runtimes

Large 11-gallon fuel capacity means many hours of run time before refueling. Improved fuel system design reduces a no-start condition if overfilled.

## Auxiliary power quality

Trailblazer 330 engine-driven welders produce auxiliary power with four percent total harmonic distortion.

## Typical equipment power usage

Trailblazer engine-driven welders will easily start and run the following:


| EQUIPMENT | STARTING WATTS | RUNNING WATTS |
|---|---|---|
| **Barn Cleaner** (5 hp) | 11,600 | 3,000 |
| **Silo Unloader** (5 hp) | 12,200 | 4,300 |
| **Portable Conveyor** (1/2 hp) | 3,400 | 1,000 |
| **Milker** (5 hp) | 10,500 | 2,800 |
| **Hand Drill** (1/2 inch) | 600 | 600 |
| **Circular Saw** (8-1/4 inch) | 1,400 | 1,400 |
| **Air Compressor** (1-1/2 hp) | 8,200 | 2,200 |
| **Flood Lights** (Vapor) | 1,250 | 1,000 |
| **Spectrum® 625 X-TREME™** (30 A, 230 V, 1/2-inch cut) | 6,900 | 6,900 |

*To size a unit that has enough power output in watts, add the watts for the items you want to simultaneously run. Tools with induction motors may require three to seven times the listed wattage when starting.* ***All data listed is approximate — check your tool for specific wattage requirements.***

## Easy maintenance

With its intuitive design, the daily maintenance of our Trailblazer engine-driven welders is fast and easy. Front panel maintenance displays help you know when your equipment needs to be serviced. And servicing is simple because of:

- Oil checks that can be performed easily through the top of the machine by the access door
- Toolless panels that allow for quick access
- Single-side fuel fill and oil drain/filter

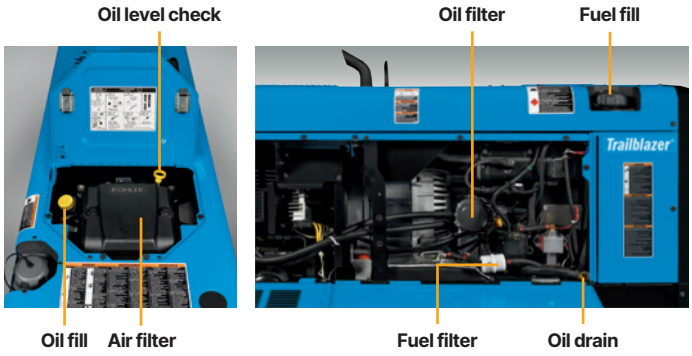


## Reversed air flow for optimized cooling

Exclusive engine and interior componentry design operates cooler and more efficiently. The engine is rotated towards the front to create more efficient airflow. More efficient airflow and exclusive engine location are significant contributors to reduced sound level and size reduction. Hot air recirculation is eliminated when machine is mounted in tight spots, and internal parts are kept cool for optimal performance.



## Wireless interface control (option)

WIRELESS INTERFACE CONTROL

**Get full control of your machine in the palm of your hand so you can work hassle free.** With wireless interface control, you can change welding processes, adjust parameters, select and save preset programs, turn the machine on/off, get service reminders and more from wherever you are on the jobsite. Extend time between fill ups and maintenance intervals while eliminating the need to go back to your machine to make adjustments.




### View status
View engine status, fuel level, and battery charge level of remote.

### Select processes
View and select between all available processes.

### Contractor on/off
Turn contactor on/off manually in remote welding mode.

### Engine on/off
Turn engine on/off with remote.

### Custom programs
Save custom presets in up to four programs and easily switch between pre-programmed settings.

### Fine-tune arc
Quickly adjust and save arc control settings including DIG, DIG range inductance and Auto-Stop.

### Amp/volt adjust
Adjust amperage or voltage, by increments or percentage, while welding.

# Specifications (Subject to change without notice.)

| WELDING MODE | PROCESS | AMP/VOLT RANGES | RATED WELD OUTPUT AT 104°F (40°C)* | SINGLE-PHASE AUXILIARY POWER | SOUND LEVELS AT 7 M (23 FT.) | DIMENSIONS | NET WEIGHT** |
|---|---|---|---|---|---|---|---|
| CC/DC | Stick/TIG | 20–330 A | 314 A at 32.5 V, 100% duty cycle | Peak: 12,000 watts<br>Continuous: 10,500 watts<br>**Excel™ power**<br>2,400 watts, 20 A at 120 V, 60 Hz pure auxiliary power at idle speed and while welding | **Weld**<br>150 A load: 69.5 dB (94.7 Lwa)<br>330 A load: 75.3 dB (100.6 Lwa)<br>**Excel™ power**<br>65 dB (90 Lwa) | H: 27 in. (686 mm)<br>H: 31 in. (787 mm)<br>*(to top of exhaust)*<br>W: 20.46 in. (520 mm)<br>D: 51.88 in. (1,318 mm) | 587 lb. (266 kg) |
| CV/DC | MIG/FCAW | 15–40 V | 330 A at 30.5 V, 100% duty cycle | | | | |
| Battery charge/ crank assist | | 12/24 V | Charge: 150 A<br>Crank assist: 300 A | | | | |

**Rated at sea level. **Net weight without fuel.* *Certified by Canadian Standards Association to both the Canadian and U.S. Standards.*

## Air Compressor Specifications


| COMPRESSOR BRAND AND WARRANTY | FEATURES | FREE AIR DELIVERY | WORKING PRESSURE CONSTANT | DUTY CYCLE | OIL CAPACITY | AUTOMATIC COMPRESSOR SHUTDOWNS |
|---|---|---|---|---|---|---|
| Rotorcomp, 3-year warranty | Rotary screw with electric clutch for on/off, oil change intervals 500 hours | 30 cfm (0.85 $m^3$/min.) at 3,600 rpm<br>28 cfm (0.79 $m^3$/min.) at 3,000 rpm | 80–160 psig | 100% | 1.75 qt. (1.7 L) | High pressure (160 psi) |

## Engine Specifications (Engines warrantied separately by the engine manufacturer.)

| ENGINE BRAND AND WARRANTY | HORSEPOWER (HP) | TYPE | WELD SPEED | IDLE SPEED | FUEL CAPACITY | OIL CAPACITY | STANDARD SHUTDOWNS |
|---|---|---|---|---|---|---|---|
| Rehlko ECH749, 3-year warranty | 27 hp at 3,600 rpm | EFI, twin-cylinder, four-cycle overhead valve, air-cooled industrial gasoline* engine | Advanced Auto-Speed™ varies between 2,400–3,600 rpm | 2,400 rpm | 11 gal. (41.6 L) | 1.7–1.9 qt. (1.6–1.8 L) | Low oil pressure |

**Fuel stabilizer is recommended for gas engines that are used infrequently.*

# Mounting Specifications

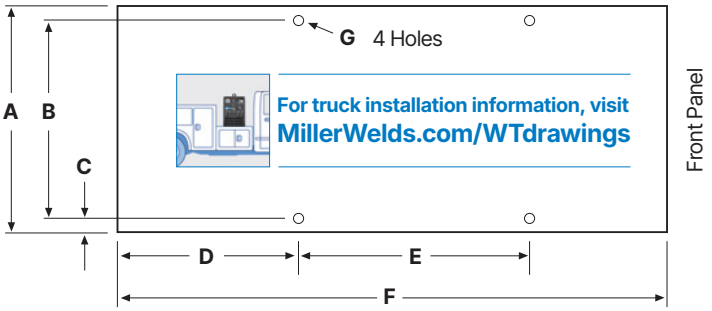


**A.** 20.46 in. (520 mm)
**B.** 16.5 in. (419 mm)
**C.** 1.72 in. (44 mm)
**D.** 16.16 in. (410 mm)
**E.** 24 in. (610 mm)
**F.** 51.88 in. (1,318 mm)
**G.** .406 in. (10.3 mm) diameter

### Small, light design


Trailblazer engine-driven welders take up less space on trucks and trailers — leaving more room on your truck for other equipment and tools. Plus, they're easier to move around jobsites — even with weld cables attached.



# Choose the Right Bobcat™ Air Pak™ or Trailblazer® Air Pak™ Engine Drive

| FUEL SYSTEM | BOBCAT 200 AIR PAK | UPGRADE | BOBCAT 265 AIR PAK | UPGRADE | TRAILBLAZER 330 AIR PAK |
|---|---|---|---|---|---|
| Fuel Type | Gasoline | | Gasoline | | Gasoline |
| **WELD** | | | | | |
| Output | CC/CV, DC only | | CC/CV, DC only | | CC/CV, DC only |
| Processes | Stick / MIG / FCAW | → | Stick / TIG / MIG / FCAW / Gouge | | Stick / TIG / MIG / FCAW / Gouge |
| Amperage Range | 30–210 A | → | 20–265 A | → | 20–330 A |
| Voltage Range | 15–25 V | → | 14–30 V | → | 15–40 V |
| **AUXILIARY POWER** | | | | | |
| Peak Watts | 8,000 watts | → | 11,000 watts | → | 12,000 watts |
| Continuous Watts | 6,500 watts | → | 9,500 watts | → | 10,500 watts |
| **DIMENSIONS** | | | | | |
| Size (H x W x D) | 24.25 x 20 x 44.61 in. | | 27.02 x 20 x 51.88 in. | | 27.02 x 20 x 51.88 in. |
| Weight | 514 lb. | | 570 lb. | | 587 lb. |
| **KEY FEATURES** | | | | | |
| Display | Segmented digital | → | LCD | | LCD |
| Maintenance | Fuel / hour / oil | → | Predictive maintenance | | Predictive maintenance |
| Auto-Set™ | — | → | Yes | | Yes |
| Battery Charge / Crank Assist | 100 A charge / 300 A crank | → | 150 A charge / 300 A crank | | 150 A charge / 300 A crank |
| ArcReach® | — | | — | → | Yes (standard) |
| Spool Gun | Direct connect | | Direct connect | | Direct connect |
| Remote Start/Stop | — | | — | → | Wireless interface control (option) |
| **COMPRESSOR** | | | | | |
| Type | Rotary screw | | Rotary screw | | Rotary screw |
| Air Rating | 30 cfm, 175 psi | | 30 cfm, 160 psi | | 30 cfm, 160 psi |
| Working Pressure | 80–175 psi | | 80–160 psi | | 80–160 psi |

# Function and Benefit Guide

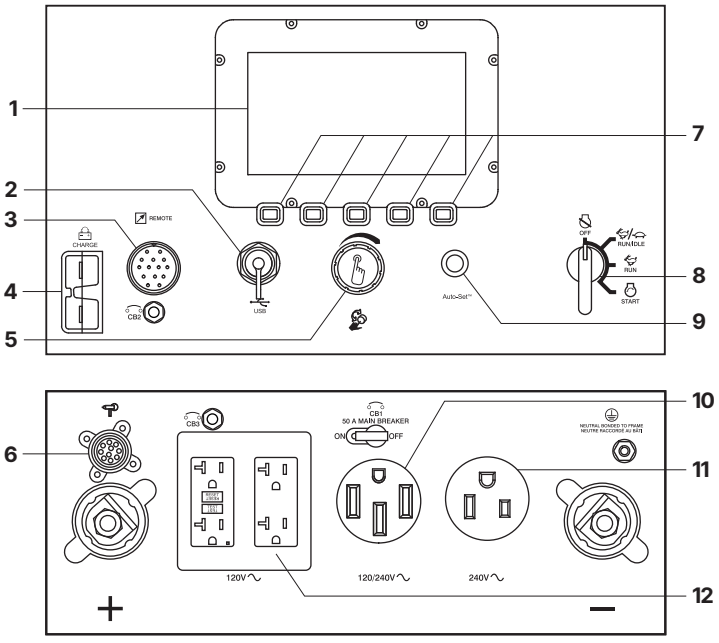


1. **Digital display** provides weld process and parameters, fuel level, maintenance and machine use information.
2. **USB port** allows software updates from a USB drive. A summary file of recorded data from the unit will be saved to a USB drive that is inserted.
3. **Standard 14-pin receptacle** for simple connection of remote controls and wire feeders. Includes **Auto Remote Sense™** which automatically switches from panel to remote amperage/voltage (A/V) control with remote connected. Eliminates confusion of a panel/remote switch.
4. **Battery charge/crank assist receptacle.**
5. **Pushbutton main control knob** used for adjusting amperage/voltage and accessing the service menu.
6. **Standard 10-pin receptacle** for simple connection of spool guns. See page 7.
7. **Pushbuttons** used for selection of weld process, menu and other machine features.
8. **Engine control switch** is used to start the engine and then select between auto idle and high speed lock positions.
9. **Auto-Set™ button** provides process-specific pre-defined parameters.
10. **120/240 V receptacle with circuit breaker.** *(For matching plug, order **119172**.)*
11. **240 V receptacle with circuit breaker.**
12. **Excel™ power (factory option, see page 8)** provides pure auxiliary power at idle speed and while welding.

# Genuine Miller® Options

**Spark Arrestor 300924** Field
Mandatory when operating on California grasslands, brush or forest-covered land, and all national forests. For other areas, check your state and local laws.

**Cold Weather Kit 301747** Field
Includes compressor oil sump and control block heaters.

**Micron Filter Element 203877** Field
Replacement micron filter for the Air Cooler with Separator.



**RTI Filter and Bracket 300491** Field
Dryer will remove water, dirt and oil as small as one micron with 99.9 percent efficiency. Can be mounted on plasma cutter or on wall. Install as close as possible to point of air consumption. *Designed for use **above** 32 degrees Fahrenheit (0°C). Bypass in colder temperatures.*




**Full KVA Adapter Cord 300517** Field
NEMA 14-50P to NEMA 6-50R. Adapts engine drive 120/240 V plug to common Millermatic® and Spectrum® 240 V plug.



**Full KVA Plug 119172** Field
120/240 V, 50 A plug (NEMA 14-50P) to fit full KVA receptacle.

**Engine Tune-Up Kit 294669** Field. Rehlko ECH749
Includes air, fuel and oil filters, and two spark plugs.

**Air Compressor Tune-Up Kit 275644** Field
Includes oil filter, air filter and oil separator.


# Genuine Miller® Accessories



**25-foot Battery Charge/Jump Cables with Plug 300422**




**Protective Cover 301730**
Heavy-duty, water- and mildew-resistant cover protects and maintains the finish of the welder.



**Sun Shade 301714**
Compatible with all Bobcat™ 265 and Trailblazer® 330 engine-driven welders.



**Screen Protector Kit 301742**
Compatible with all Bobcat™ 265 and Trailblazer® 330 engine-driven welders.




**Wireless Interface Control Replacement Kit 288137** Field
Replacement kit for wireless interface control machines. NOT compatible with machines that are not equipped with wireless interface control. Includes replacement remote, magnetic lanyard, USB charger, 110-volt adapter, and two screen protectors.

**Wireless Interface Control Protective Covers 287594**
Five-pack of screen protectors for wireless interface control remote.

## MIG/Flux-cored Welding



**Millermatic® 142 907838**
See literature DC/12.41

**Millermatic® 211 PRO 907839**
See literature DC/12.61

The Millermatic line of MIG welders are complete arc welding power source, wire feeder and gun packages designed for portability and ease of use.

*Note: The Millermatic machines can be operated utilizing auxiliary power.*

# Genuine Miller® Accessories

## MIG/Flux-cored Welding (cont.)



**ArcReach® SuitCase® 8**
**951726001** With Bernard® BTB Gun 300 A
**951727001** With Bernard® S-Gun™
**951728001** With Bernard® IronPro™ 350 gun

**ArcReach® SuitCase® 12**
**951729001** With Bernard® BTB Gun 300 A
**951730001** With Bernard® S-Gun™
**951731001** With Bernard® IronPro™ 350 gun

Portable feeder designed to run off of arc voltage. See literature M/6.55.



**ArcReach® Smart Feeder 951733**
Includes drive rolls and Bernard® PipeWorx 300-15 MIG gun. For MIG, FCAW, and advanced RMD® and pulse processes. See literature M/6.55.



**SuitCase® 12RC Wire Feeder 951580001**
Lightweight and flexible enough to run wires up to .062-inch diameter. Includes remote voltage control, drive roll kit and Bernard® BTB Gun 300 A. See literature M/6.5.



**Spoolmatic® 30A Spool Gun 130831**
Rated at 200 amps, 100 percent duty cycle with 30-foot (9 m) cable. See literature M/1.73.



**Spoolmate™ 200 Spool Gun 300497**
Rated at 160 amps, 60 percent duty cycle with 20-foot (6 m) cable. See literature M/1.47.

**XR™ Wire Feeder and Guns**
Push-pull system designed to handle difficult-to-feed soft alloy wires such as aluminum. See literature DC/34.0 and M/1.71 through M/1.74.

## Stick (SMAW) Welding

**Weld Leads**

**2/0 Stick Cable Set, 50 ft. (15 m) 173851**
Consists of 50-foot (15 m) 2/0 electrode cable with holder, and 50-foot (15 m) work cable with clamp. 350 A, 100% duty cycle.

**2/0 Stick Cable Set, 100/50 ft. (30.5/15 m) 043952**
Consists of 100-foot (30.5 m) 2/0 electrode cable with holder, and 50-foot (15 m) work cable with clamp. 300 A, 100% duty cycle.

## TIG (GTAW) Welding



**Dynasty® 210 Series**
For portable AC/DC TIG. See literature AD/4.81.

## Multiprocess Welding



**Multimatic® 215 PRO 907840**
Portable, all-in-one multiprocess package weighs only 35 pounds (15.9 kg), and features excellent arc characteristics. Exclusive multi-voltage plug (MVP™) provides flexibility to plug into 120- or 240-volt power. Take it anywhere you need to MIG, TIG or stick weld. See literature DC/13.5.

## Remote Solutions



**ArcReach® Stick/TIG Remote 301325**
When paired with an ArcReach power source, provides remote control of the power source without a control cord — saving time and money. See literature AY/14.5.



**Wireless Remote Hand Control 301582**
For remote current, voltage and contactor control. Receiver plugs directly into the 14-pin receptacle of Miller machine. Up to 300-foot (91.4 m) operating range.



**RHC-14 Hand Control 242211020**
Miniature hand control for remote current and contactor control. Dimensions: 4 x 4 x 3.25 inches (102 x 102 x 82 mm). Includes 20-foot (6 m) cord and 14-pin plug.



**PRHC-14 Hand Control 195511**
Complete current or voltage control brings 120 volts GFCI power to work area in a single cord. Housed in a durable, light aluminum case and includes 125-foot (38 m) cord with plugs.

**Extension Cables for 14-Pin Remote Controls**
**242208025** 25 ft. (7.6 m)
**242208050** 50 ft. (15.2 m)
**242208080** 80 ft. (24.4 m)

**Remote Output Panel Kit 951850**
If your engine-driven welder is mounted on a truck, easily locate the outputs at the point of use with the auxiliary power and weld output remote panel. See literature AY/20.5.

## Plasma Cutting



*Spectrum 375 X-TREME and 625 X-TREME shown.*

**Spectrum® 375 X-TREME™ 907529**
See literature PC/9.2.
**Spectrum® 625 X-TREME™ 907579**
See literature PC/9.6.
**Spectrum® 875 907583**
See literature PC/9.8.
Spectrum 375 X-TREME and 625 X-TREME come complete with protective X-CASE™ (not shown).

## Trailers and Hitches



**HWY-Mid Frame Trailer 301438**
1,424-pound (646 kg) capacity highway trailer with welded steel tubing frame, heavy-duty axle with roller bearing hubs and leaf-spring suspension. Includes jack stand, fenders, lights, and dual hitch with 2-inch (50 mm) ball hitch and 3-inch (76 mm) lunette eye.

*Note: Trailer is shipped unassembled.*



**Cable Tree 043826**
Provides an area to conveniently wrap weld cables and extension cords.



**2-In-1 Document/ Fire Extinguisher Holder 301236**
Stores documents and holds a five-pound fire extinguisher.

*Note: Holder shown mounted on trailer. Fire extinguisher not included.*

# Ordering Information

| EQUIPMENT AND OPTIONS | STOCK NO. | DESCRIPTION | QTY. | PRICE |
|---|---|---|---|---|
| **Trailblazer® 330 Air Pak™** (Rehlko engine) | **907836**<br>**907836002**<br>**907836003** | With battery charge/crank assist and Excel™ power<br>With battery charge/crank assist, Excel™ power, and cooler/separator<br>With battery charge/crank assist, Excel™ power, polarity reversing, wireless interface control, and cooler/separator | | |
| **Field Options** *Options listed below can be added to the above packages. Installation is required.* | | | | |
| Spark Arrestor | **300924** | | | |
| Cold Weather Kit | **301747** | Includes compressor oil sump and control block heaters | | |
| Micron Filter Element | **203877** | For use with air cooler with separator | | |
| RTI Filter and Bracket | **300491** | | | |
| Full KVA Adapter Cord | **300517** | | | |
| Full KVA Plug | **119172** | | | |
| Engine Tune-Up Kit | **294669** | For Rehlko CH749. Includes air, fuel and oil filters, and two spark plugs | | |
| Air Compressor Tune-Up Kit | **275644** | Includes oil filter, air filter and oil separator | | |
| **Accessories** | | | | |
| 25-foot Battery Charge/Jump Cables w/Plug | **300422** | | | |
| Protective Cover | **301730** | | | |
| Sun Shade | **301714** | | | |
| Screen Protector Kit | **301742** | | | |
| Wireless Interface Control Replacement Kit | **288137** | Includes replacement remote, magnetic lanyard, USB charger, 110-volt adapter, and two screen protectors | | |
| Wireless Interface Control Protective Covers | **287594** | Five-pack of screen protectors for wireless interface control remote | | |
| **MIG/Flux-cored Welding** | | | | |
| Millermatic® Series MIG Welders | | See page 6 | | |
| Wire Feeders | | See page 7 | | |
| Spool Guns | | See page 7 | | |
| XR™ Wire Feeder and Guns | | See literature DC/34.0 and M/1.71 through M/1.74 | | |
| **Stick Welding** | | See page 7 | | |
| **TIG Welding** | | See page 7 | | |
| **Multiprocess Welding** | | See page 7 | | |
| **Remote Solutions/Extension Cables** | | See page 7 | | |
| **Plasma Cutting** | | See page 7 | | |
| **Trailers and Hitches** | | | | |
| HWY-Mid Frame Trailer | **301438** | Trailer with lights, fenders and dual hitch. For highway use | | |
| Cable Tree | **043826** | Trailer-mounted cable holder | | |
| 2-In-1 Document/Fire Extinguisher Holder | **301236** | Stores documents and holds a five-pound fire extinguisher | | |

DATE: TOTAL QUOTED PRICE:

**Distributed by:**

Miller®
The Power of Blue®

© 2026 Miller Electric Mfg. LLC